


CUSTOMER: ACTION MOBILE INDUSTRIES	DESCRIPTION: FLOOR PLAN
UNIT SIZE: 4864 / 47'-0" X 60'-0"	DATE: 1/25/11
SR. NO.: 11-6187-90	SCALE: 3/16" = 1'-0"
LO: SR	

INSP. :  
IN / FACTORY

STATE CERT. :  
INDIANA

CONST. :  
IBC / NEC

ADDITIONAL :

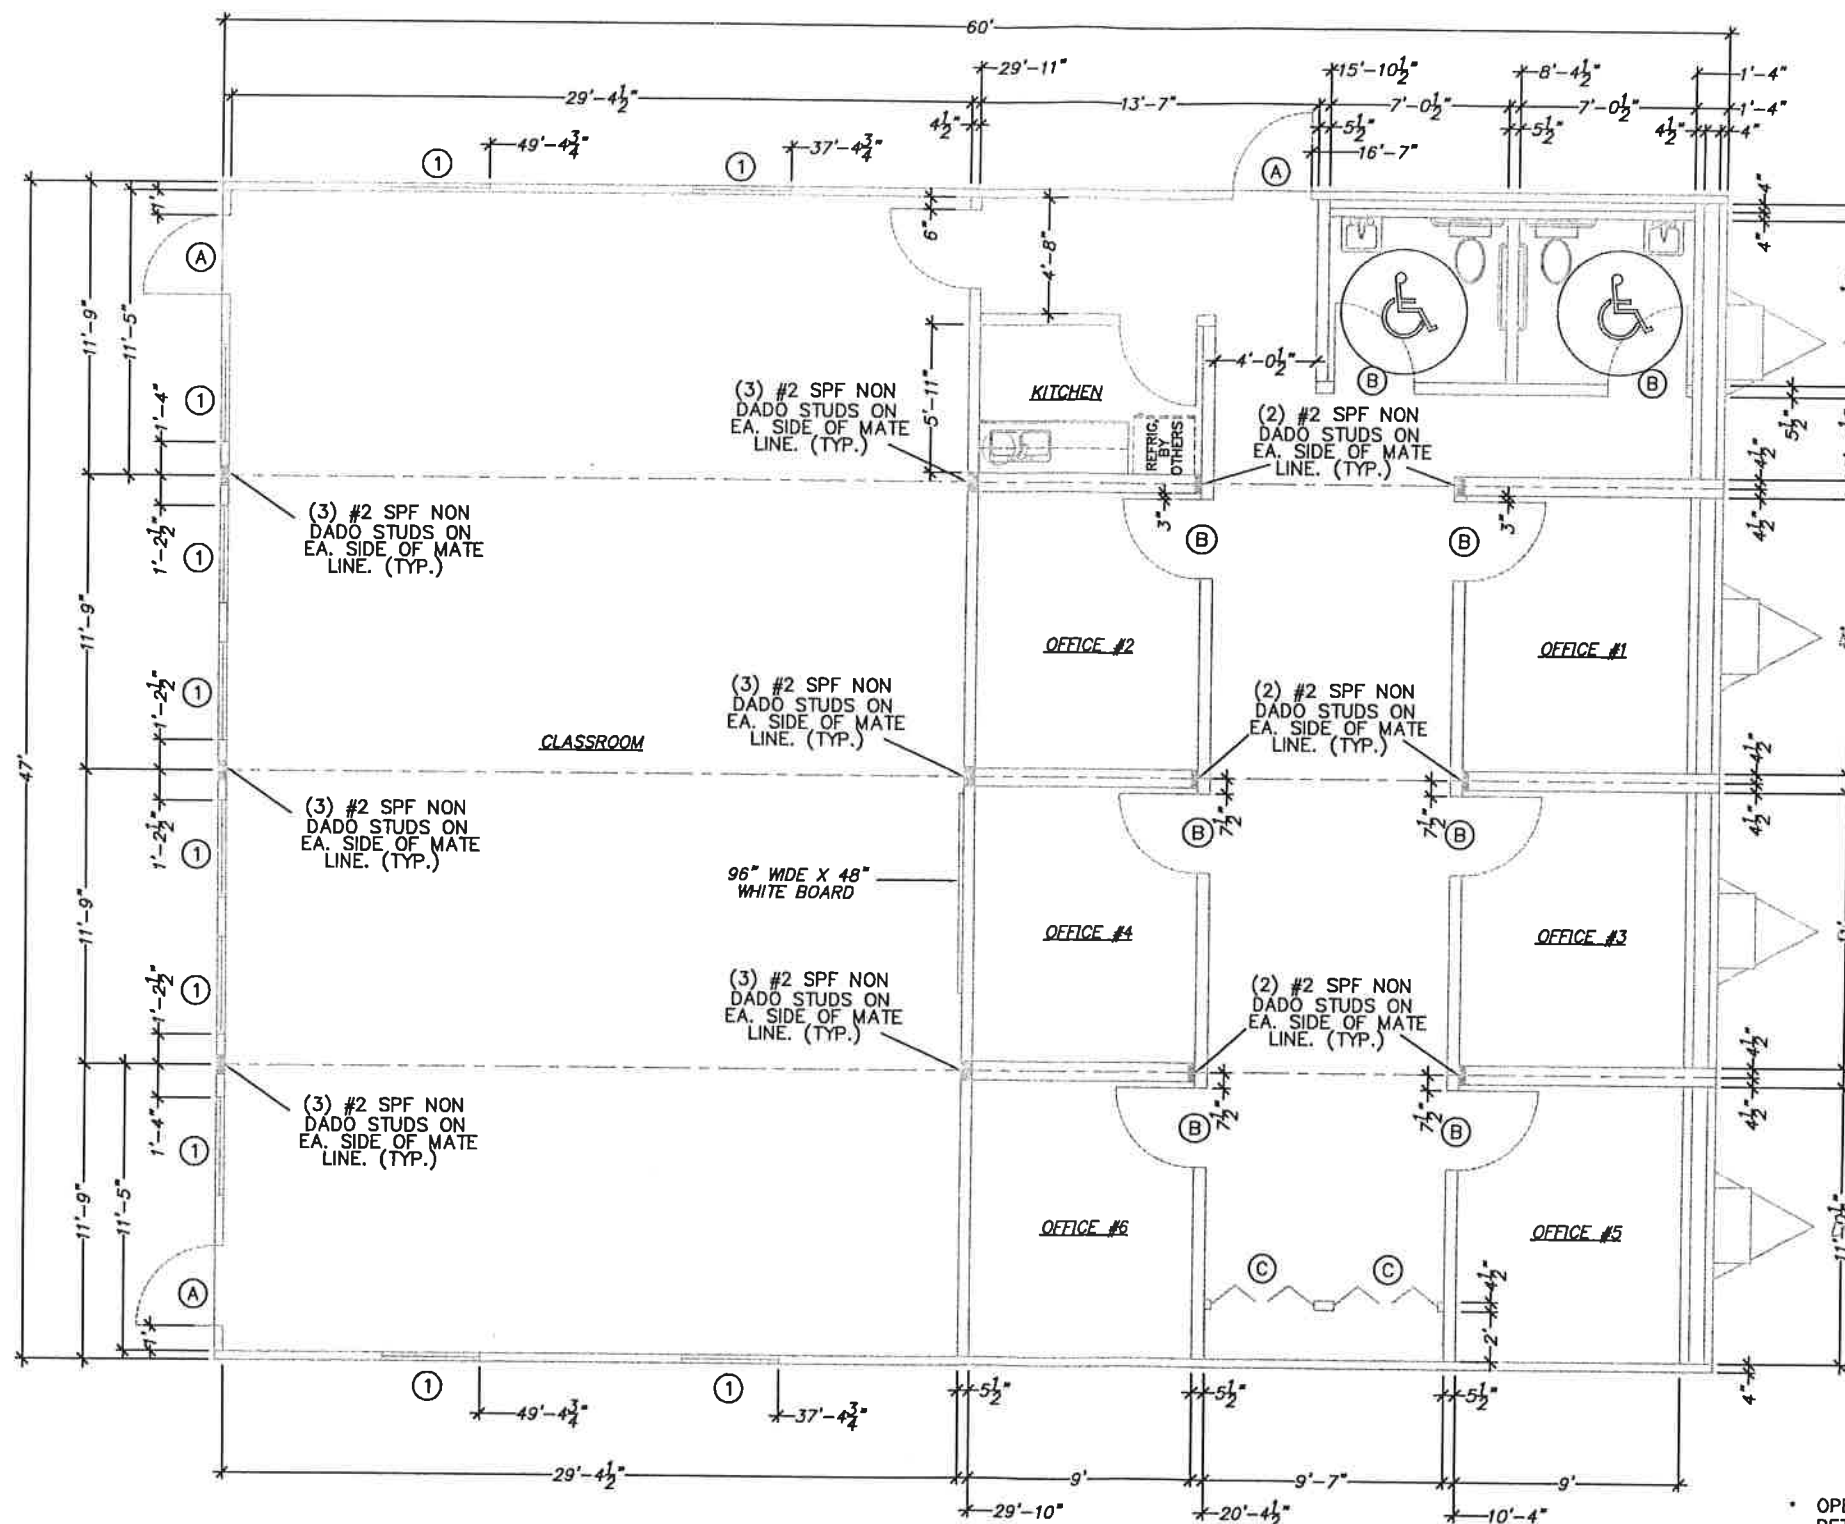

#### EXTERIOR DOOR

DES.	SIZE	TYPE	ROUGH OPENING
A	3680	STEEL/STEEL JAMB	38 1/4" x 81 1/4"

#### INTERIOR DOOR

DES.	SIZE	TYPE	ROUGH OPENING
B	3680	H.C. / PINE JAMB	38" x 82"
C	4880	BI-FOLD/PINE JAMB	50" x 82"

#### WINDOWS

DES.	SIZE	TYPE	ROUGH OPENING	A.F.F.
1	4627	H. SLIDER	46 5/8" x 27 1/4"	37 3/4"

#### HEADER SCHEDULE

- OPENINGS UP TO 4'-8" - (2) 2 x 4 #2 SPF OR BETTER ON EDGE WITH 1/2" PLYWOOD FILLER.
- OPENINGS UP TO 6'-11" - (2) 2 x 6 #2 SPF OR BETTER ON EDGE WITH 1/2" PLYWOOD FILLER.
- OPENINGS UP TO 8'-9" - (2) 2 x 8 #2 SPF OR BETTER ON EDGE WITH 1/2" PLYWOOD FILLER.

#### NOTES :

\*SEE FLOORPLANS FOR SPECIAL CONDITIONS

\*THIS CHART APPLIES TO LOAD BEARING SIDEWALLS ONLY  
ENDWALLS BELOW APPROVED TRUSSES ARE NOT CONSIDERED  
LOAD BEARING AND WILL ONLY REQUIRE A HEADER CAPABLE  
OF SUPPORTING THE WALL DEAD LOAD ABOVE THE OPENING